









HT Light duty metal anchors

Economical metal frame anchor

Anchor version	Benefits
 HT (M8-M10)	<ul style="list-style-type: none"> - Fastening door and window frames - No risk of distortion or forces of constraint - Expansion cone cannot be lost

Base material	Load conditions
 Concrete (non-cracked)  Solid brick  Hollow brick  Autoclaved aerated concrete	 Fire resistance

Approvals / certificates

Description	Authority / Laboratory	No. / date of issue
Fire test report	IBMB, Braunschweig	UB 3016/1114-CM / 2006-03-13
Assessment report (fire)	warringtonfire	WF 327804/A / 2013-07-10

Basic loading data (for a single anchor)

All data in this section applies to:

- Correct setting (See setting instruction)
- No edge distance and spacing influence
- Base material as specified in the table
- Non-cracked concrete: $f_{cc} \geq 20 \text{ N/mm}^2$
- Minimum base material thickness

Characteristic resistance

Anchor size		HT 8	HT 10
Concrete, $f_{cc}=30 \text{ N/mm}^2$	N_{Rk} [kN]	4,2	5,0
	V_{Rk} [kN]	6,6	7,0
Aerated concrete PP2 ^{a)}	N_{Rk} [kN]	-	0,3
	V_{Rk} [kN]	-	0,5
Solid brick Mz 12	N_{Rk} [kN]	1,8	2,6
	V_{Rk} [kN]	-	5,0
Sand-lime solid brick, KS 12	N_{Rk} [kN]	1,8	2,6
	V_{Rk} [kN]	-	5,0
Sand-lime hollow brick, KSL	N_{Rk} [kN]	-	1,5
	V_{Rk} [kN]	-	0,5

a) Rotary drilling only.

Recommended loads

Anchor size		HT 8	HT 10
Concrete, $f_{cc}=30 \text{ N/mm}^2$	N_{Rec} [kN]	1,4	1,7
	V_{Rec} [kN]	0,5	0,5
Aerated concrete PP2 ^{a)}	N_{Rec} [kN]	-	0,1
	V_{Rec} [kN]	-	0,15
Solid brick Mz 12	N_{Rec} [kN]	0,6	0,8
	V_{Rec} [kN]	-	0,5
Sand-lime solid brick, KS 12	N_{Rec} [kN]	0,6	0,8
	V_{Rec} [kN]	-	0,5
Sand-lime hollow brick, KSL	N_{Rec} [kN]	-	0,5
	V_{Rec} [kN]	-	0,15

a) Rotary drilling only.

Materials

Material quality

Part	Material
Bolt	Steel strength 4.8, zinc plated to 5 μm
Sleeve	Steel 02 DIN 17162, sendzimir zinc plated to 20 μm

Setting information

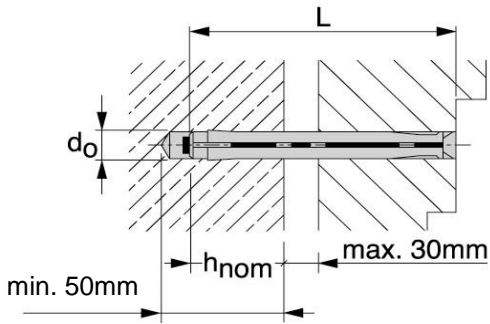
Setting details

Anchor size		HT 8	8x72	8x92	8x112	8x132	8x152	8x182
Nominal diameter of drill bit	d_0 [mm]		8	8	8	8	8	8
Depth of drill hole	h_1 [mm]		50	50	50	50	50	50
Anchorage depth	h_{nom} [mm]		30	30	30	30	30	30
Anchor length	L [mm]		72	92	112	132	152	182
Torque moment	$T_{inst}^{a)}$ [Nm]		100	100	100	100	100	100
Minimum base material thickness	h_{min} [mm]		4	4	4	4	4	4
Drill bit			TE-CX-8/17		TE-CX-8/22		TE-CX-8/27	

Setting details

Anchor size		HT 10	10x72	10x92	10x112	10x132	10x152	10x182	10x202
Nominal diameter of drill bit	d_0 [mm]		10	10	10	10	10	10	10
Depth of drill hole	h_1 [mm]		50	50	50	50	50	50	50
Anchorage depth	h_{nom} [mm]		30	30	30	30	30	30	30
Anchor length	L [mm]		72	92	112	132	152	182	202
Torque moment	$T_{inst}^{a)}$ [Nm]		100	100	100	10	10	10	10
Minimum base material thickness	h_{min} [mm]		8/4	8/4	8/4	8/4	8/4	8/4	8/4
Drill bit			TE-C-10/17		TE-C-10/22		TE-C-10/27		TE-C-10/37

a) First value: solid base material, second value: hollow base material.

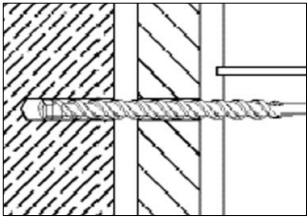
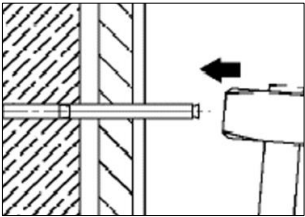


Installation equipment

Anchor size	HT 8	HT 10
Rotary hammer	TE1-TE16	
Other tools	hammer, screwdriver	

Setting instruction

*For detailed information on installation see instruction for use given with the package of the product.

Setting instruction		
<p>1. Drill hole with the drill bit</p> 	<p>2. Install anchor</p> 	<p>3. Drive screw into anchor</p> 